


# DCN-MR Meeting Recorder

www.boschsecurity.com



**BOSCH**  
Invented for life

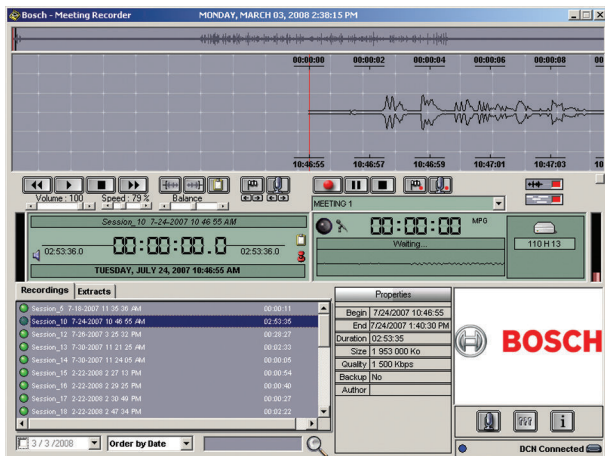

- ▶ Recording in PCM/WAV, WMA or MP3 audio format
- ▶ Stereo track can be used for bilingual recording
- ▶ Ability to attach speaker names in the audio file
- ▶ Network sharing of audio files

The Meeting Recorder can be used in combination with CCS 900, DCN Next Generation or DCN Wireless systems.

The DCN-MR Meeting Recorder software is designed for recording and playback purposes during a meeting or conference.

Recording is done on the hard drive of a computer in PCM/WAV, WMA or MP3 format.

## Functions

### Recording

The Meeting Recorder can record two analog audio channels. In most cases one audio channel is sufficient to record the floor language. However, in some (bilingual) applications it is ideal to record two channels simultaneously.

### Attach speaker names

The name of the current speaker can be attached in the audio file, during or after the meeting. This can be done manually or automatically. Manually by simply double clicking on the delegates name in list.

Automatically when the DCN-MR is coupled with the DCN Central Control Unit<sup>2</sup>. For automatic attaching of the speaker names, the delegate names must be

assigned to the corresponding microphone numbers. Additional conference information, such as the agenda or meeting minutes can also be included in the audio file.

<sup>2</sup> Open interface LBB 4187/00 or streaming meeting data DCN-SWSMD additional required

### Playback

Recorded files can be played back for listening or transcribing. While the audio file is played the name of the speaker (if available) and time-information can be displayed in a window of the text editor. In case two audio sources are recorded, they are recorded as one stereo file. When the balance slider is in the far left position (or right), only the left (or right) channel is heard during playback. When the balance slider is in middle position both audio channels are heard (stereo) making this product ideal for interpreter training applications.

### Transcription

Although transcription is possible through the Meeting Recorder, the optional DCN Transcription Module (DCN-MRT) is especially suited for it. The DCN-MRT is in fact the same software as the DCN-MR but without the recording function.

For easy control during transcription; start, stop, fast-forward/rewind, an optional transcription foot pedal is available (DCN-MRFP).

### Ease of use

Although it offers many powerful features, the software is easy to use. The intuitive graphic user interface is divided into recording, playback, visualization and files sections.

### Installation/configuration notes

#### Installation

The DCN-MR Meeting Recorder software is supplied on DVD and can be installed on one or more computers.

The software is designed to be used on a computer network. This gives the possibility, for example, to install a Meeting Recorder next to the DCN CCU, while storage of the files is done in parallel on a server via the computer network. Persons responsible for transcription can have access from their computer via the network to the files on the server.

#### Licence

Licensing of the Meeting Recorder is done with USB dongle. The Meeting Recorder software can be installed on more computers. As soon the USB dongle is plugged-in, the software is ready to use with the applicable licenses. This makes it very flexible, with a minimum of effort and cost.

For demonstration purposes, the DCN-MR software can be used to make or play recordings of five minutes maximum without the dongle.

### Parts included

Quantity	Component
1	DCN-MR Meeting Recorder software on DVD
1	USB dongle (blue)
1	Audio connection cable

### Technical specifications

Recording formats	(max. sample rate)
	WMA (128 kbps)
	PCM / WAV (48 kHz)
	MP3 (256 kbps)
System platform	Windows 7 Home Premium (32 and 64 bits) or above or Windows Vista Home Premium(32 or 64 bits) or above

### Ordering information

#### DCN-MR Meeting Recorder

used with the DCN-MR or DCN-MRT  
Order number **DCN-MR**

#### Accessories

#### DCN-MRT Transcription Module

used with DCN-MR or CCS-CURD  
Order number **DCN-MRT**

#### DCN-MRFP Transcription Foot Pedal

used with the DCN-MR or DCN-MRT  
Order number **DCN-MRFP**

**Represented by:**

**Americas:**

Bosch Security Systems, Inc.  
12000 Portland Avenue South  
Burnsville MN 55337, USA  
Phone: +1-800-392-3497  
Fax: +1-800-955-6831  
audiosupport@us.bosch.com  
www.boschsecurity.com

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5617 BA Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
Fax: +31 40 2577 330  
emea.securitysystems@bosch.com  
www.boschsecurity.com

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security  
Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
apr.securitysystems@bosch.com  
www.boschsecurity.asia

**China:**

Bosch (Shanghai) Security Systems Ltd.  
201 Building, No. 333 Fuquan Road  
North IBP  
Changning District, Shanghai  
200335 China  
Phone +86 21 22181111  
Fax: +86 21 22182398  
www.boschsecurity.com.cn

**America Latina:**

Robert Bosch Ltda Security Systems Division  
Via Anhanguera, Km 98  
CEP 13065-900  
Campinas, Sao Paulo, Brazil  
Phone: +55 19 2103 2860  
Fax: +55 19 2103 2862  
al.securitysystems@bosch.com  
www.boschsecurity.com